
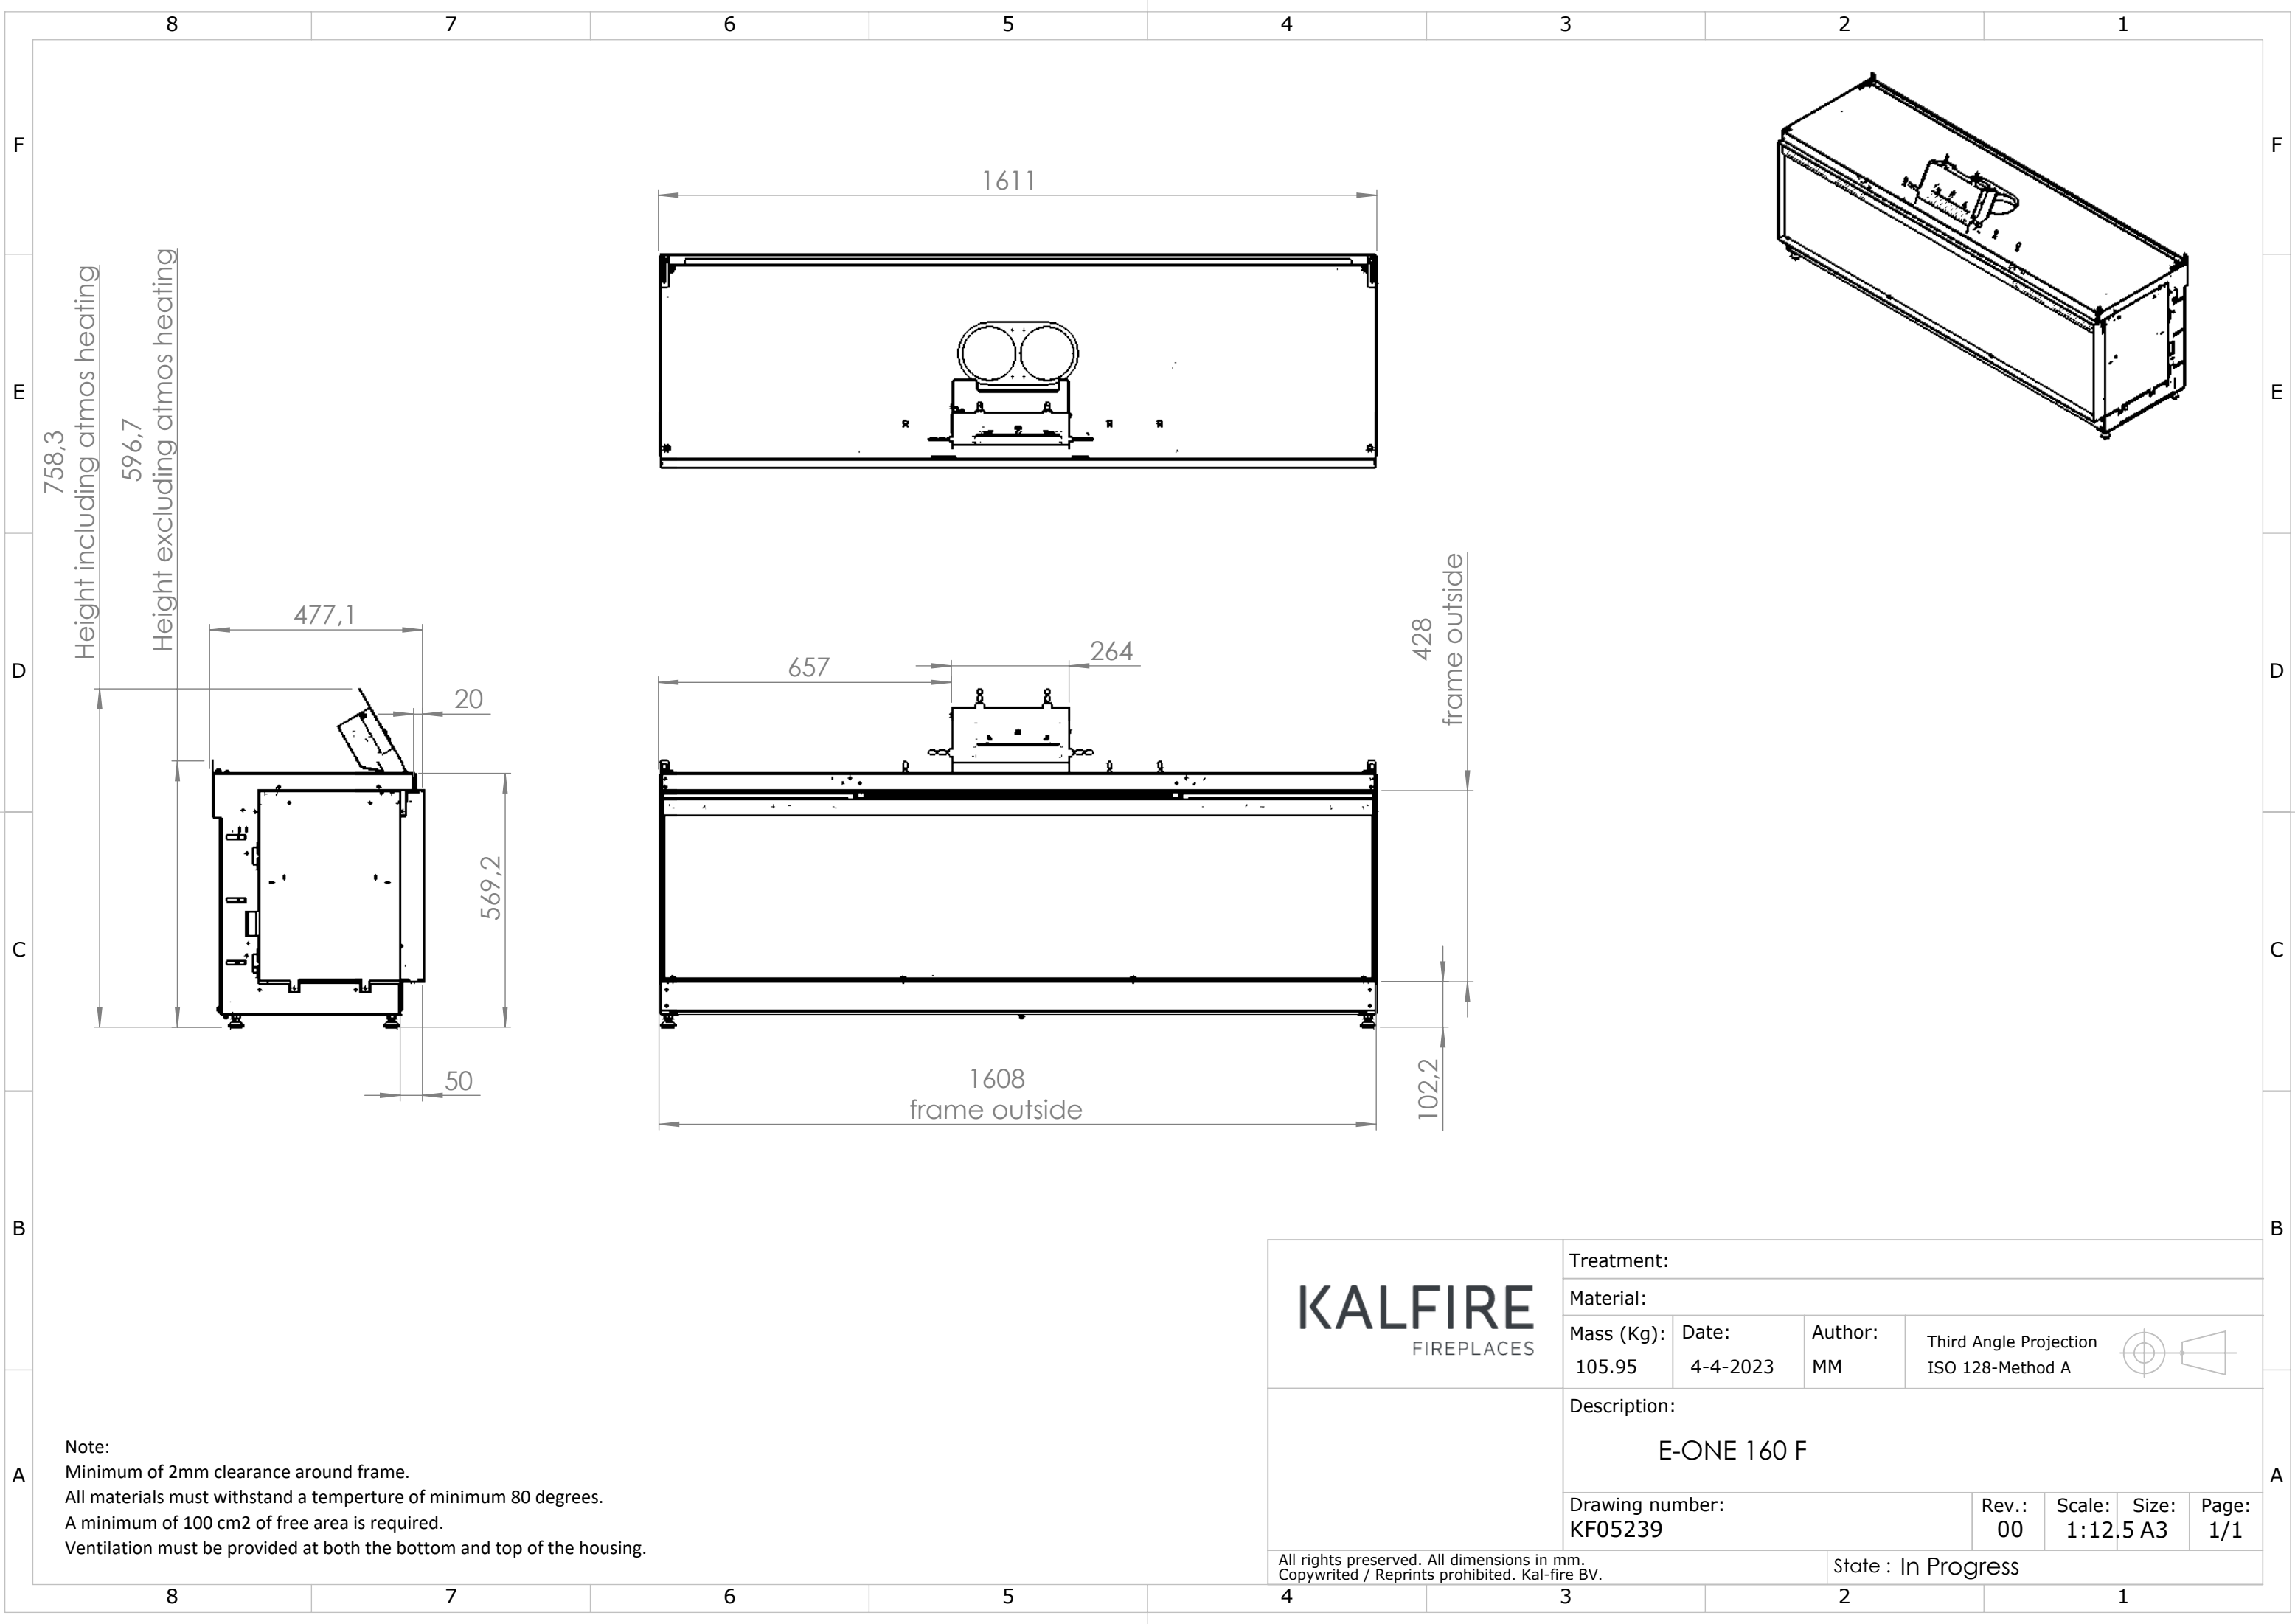




Note:
Minimum of 2mm clearance around frame.
All materials must withstand a temperture of minimum 80 degrees.
A minimum of 100 cm2 of free area is required.
Ventilation must be provided at both the bottom and top of the housing.

KALFIRE
FIREPLACES

Treatment:				
Material:				
Mass (Kg):	Date:	Author:	Third Angle Projection	
105.95	4-4-2023	MM	ISO 128-Method A	
				
Description:				
E-ONE 160 F				
Drawing number:			Rev.:	Scale:
KF05239			00	1:12,5 A3
			Size:	Page:
			1/1	

All rights reserved. All dimensions in mm.
Copywrited / Reprints prohibited. Kal-fire BV.

State : In Progress