


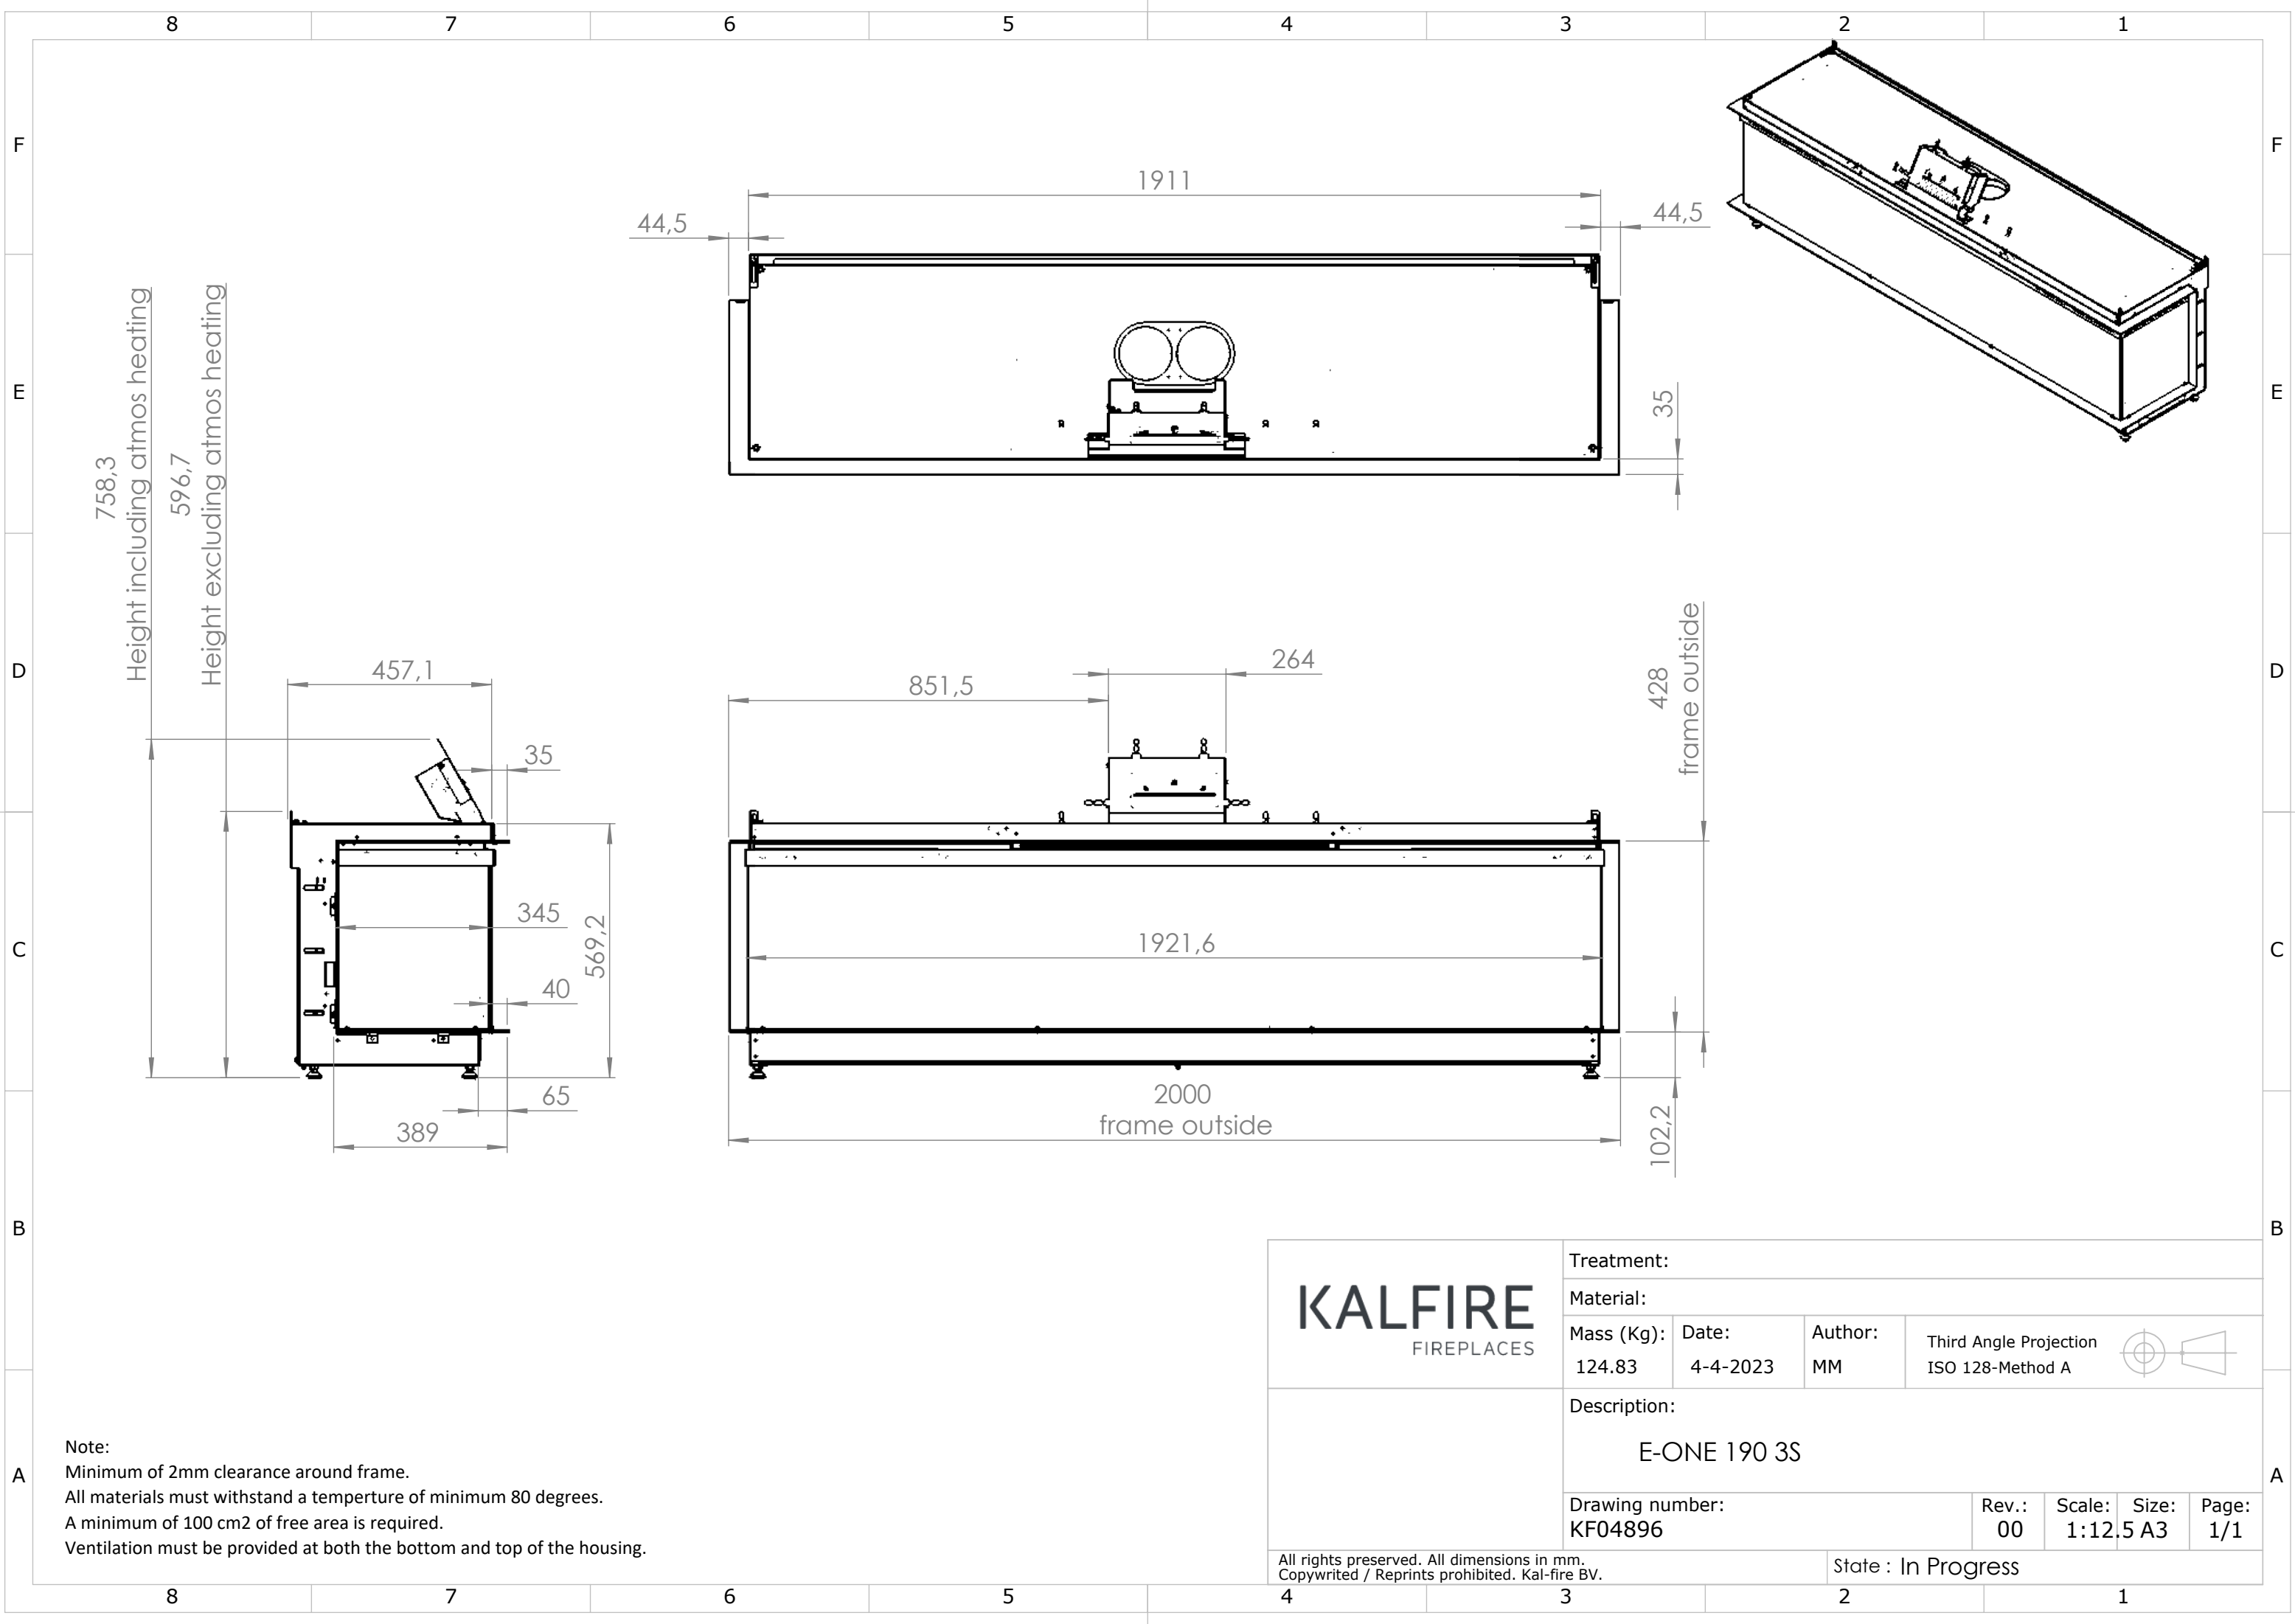

Note:
Minimum of 2mm clearance around frame.
All materials must withstand a temperture of minimum 80 degrees.
A minimum of 100 cm2 of free area is required.
Ventilation must be provided at both the bottom and top of the housing.

KALFIRE
FIREPLACES

Treatment:				
Material:				
Mass (Kg):	Date:	Author:	Third Angle Projection	
124.83	4-4-2023	MM	ISO 128-Method A	
				
Description:				
E-ONE 190 3S				
Drawing number:			Rev.:	Scale:
KF04896			00	1:12,5 A3
			Size:	Page:
			A3	1/1

All rights preserved. All dimensions in mm.
Copywrited / Reprints prohibited. Kal-fire BV.

State : In Progress